

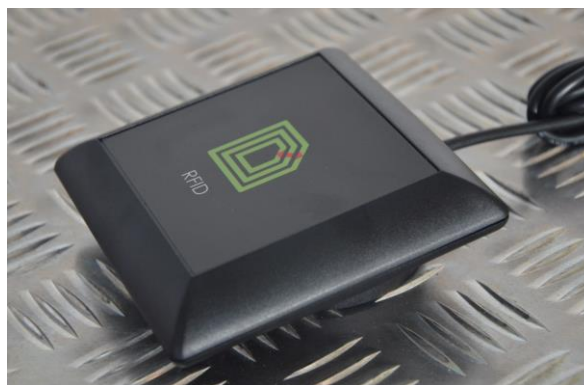
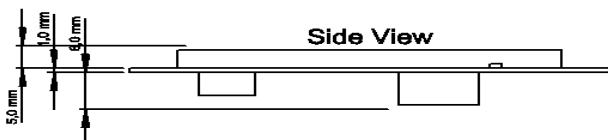


RFO DTLF USB (Desktop RFID LF Reader/writer)

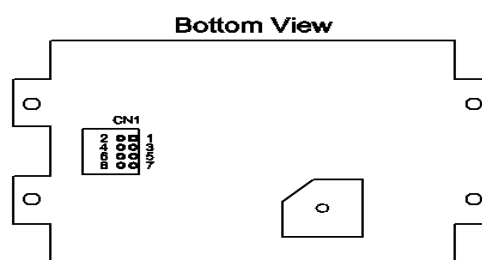

Product Description		RFO DTLF USB		
Technical data				
Read/write unit version		HID PROX	MULTI 125	INDITAG
Mousing:	Material ABS, colour black or white			
Frequency:	125kHz			
Dimensions:	110mm x 110 mm x 40/25 mm			
Power Supply:	5V ± 10% via communication cable			
Supply Current:	140mA	220mA	220mA	
Temperature Range:	0°C bis +50°C			
Antenna type:	aircoil			
Read-/Write range:	up to 10cm (depending from the Tag)			
Supported RFID Transponder Tags:	HID PROX	EM410x HITAG 1 HITAG 2 HITAG S EM4150 T5567 Q5	INDALA	

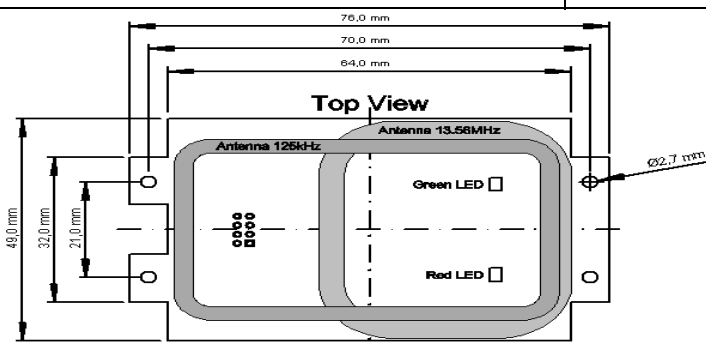

Connector CN1*	
Pin	Signal
1	USB/Supply Ground (black Wire)
2	USB Data+ (green Wire)
3	USB/Supply 5V (red Wire)
4	USB Data- (white Wire)
5	V24 RxID (Input)
6	J2-1**
7	V24 TxID (Output)
8	J2-2**

* Hirose DF11 series, 2mm pitch

** V24 operation is achieved by either closing jumper J2 on the PCB or by connecting pin 6 and pin 8 of CN1.

Artikel Nr:	RFO DTLF USB
Typical Applications	
Asset Management	POS
Fashion & Apparel industrie	Pharma and Cosmetic
General Logistics	Health Care
Industry & Automotive	Bibliothec and Documents



Contact:

sales@radioforce.net
www.radioforce.net