



RFO TPC 8A ANDROID 8 inch industrial RFID tablet PC



Product Description

Performance

The RFO TPC8 A Tablet PC is a full rugged and powerfully equipped tablet PC. This rugged tablet PC integrated with 8" touch screen and a high performance, low power consumption Android 4.4. With options for a 2D barcode scanner, magnetic stripe reader, smart card reader, RFID, and dual front & rear camera, these rugged tablets offer seamless information capture for immediate transmission. RFO TPC8A is a fan less design and compliant IP65 water and dust proof protection. This robust RFO TPC8A works up to full 10 hours with one time battery charge and supports hot swap. With an outdoor-viewable display integrated with touch screen, the rugged mobile RFO TPC8A performs efficient outdoor as well. The RFO TPC8A offers a blend of performance, integrated features and mobility. Rugged tablet PC RFO TPC8A helps every user to work smarter and more effectively. This industrial level tablet AGX TPC8A also helps to achieve e-paper for environment protection.

Efficiency

Due to all these features and functions the RFO TPC 8A can satisfy almost every application requirement or mobile need. Data transfer via WLAN or USB is not a problem and with the 3G modem it allows full connectivity even in the field. Permanently online processes will improve in the shortest time.

Ergonomie

The RFO TPC 8A has an 8-inch TFT (1024X768 XGA) LCD Touch Display. LED back light and sunlight readable makes it most ergonomic day and night. With a size of 251 x 181 x 30 (mm) and low weight of 1,3kg (incl. Second battery pack) it is handy at any moment of time.

Article no:		RFO TPC 8A	
Typical Applications			
•Manufacturing	•Health Care	•Vehicle Maintenance & Diagnostics	•Security
•Access Control	•Education	•Automotive	
•Gaming	•Hospitality	•Retail & POS	
•Insurance	•Transportation	•Home Automation	



Contact:

sales@radioforce.net
www.radioforce.net



Technical Specifications	RFO TPC 8A
System	
CPU	MT8382 Quad core 1.3GHz
RAM	LPDDRII 1G
Storage	eMCP 8G
Operating System	Android 4.4
Display	TFT LCD 8 inch Touch type: Capacitive type. Option: 4 Wires resistive type Backlight Type: LED Display Resolution: 1024 x 768 (XGA) Luminance: 700 nits Sunlight readable
Network Interface	Integrated WLAN 802.11 b/g/n Integrated Blue Tooth 4.0 3G : WCDMA 900/2100MHZ/ HSPA 7.2/5.76, 3GPP R6/GSM/GPRS/EDGE: 850/900/1800/1900 MHz
Finger Print	E-field Swipe Fingerprint Sensor
Control Switch and Buttons	1 x Power on/off button 1 x Barcode Scanner trigger button 4 x Function Keys (user define)
Indicator	3 (power, charging, system operation status)
Sensors	Proximity & Light sensor, E-Compass, Gravity Sensor
Speaker & Microphone	Built-in speaker & microphone
I/O Ports	
USB	1 x USB 2.0 Type A
DC Jack	1 x DC Power input (16V / 4A)
RS-232	1 x DB-9 RS232 Full function connector
Docking PORT	1 x 16 pin docking connector (Interface include Power, USB , Audio)
RJ45	1 x 10/100 Ethernet , Support POE (Power-Over-Ethernet applications up to 25.5W)
SIM Socket	1 x SIM socket (located underneath the external battery pack)
Power	
AC/DC Adapter	Input AC: 100~240V Output DC: 16V / 4A
Battery Pack	Internal battery, one cell DC 3.7V/ 920mAh External 3S2P, 6 Cell, DC 11.1V/ 6200mAh Support Hot Swap
Mechanical	
Dimensions	251 x 181 x 30 (mm) (9.8" x 7.1" x 1.1").
Weight	1.25Kg (2.8lbs) with batteries
Environment	
Water & Dust Resistance	IP 65
Vibration & Shock Resistance	MIL-STD-810G
Temperature	Operation: -10° – 50°C; Storage: -20°C - 70°C
Humidity	0% – 90% (non-condensing)
Regulatory	CE / FCC Class B / FCC /Rohs compliant
Option Functions	
GPS	<ul style="list-style-type: none"> High performance positioning engine. Support 50 channels. GPS L1 Frequency, C/A code. SBAS: WAAS/ EGNOS/MSAS
Camera	Front (2M) & rear (5M) dual CMOS Camera
Bar code scanner 1D or 2D (UART Interface)	1D symbologies: EAN/UPC, GS1 Databar (limited expanded & omni-directional), RSS, Code 39, Code 128, UCC/EAN 128, ISBN, ISBT, Interleaved/Matrix/ Industrial and Standard 2 of 5, Codabar, Code 93/93i, Code 11, MSI, Plessey, Telepen, postal codes (Australian) 2D symbologies: Data Matrix, PDF417, Micro PDF 417, Codablock Maxicode, QR, Aztec GS1 composite codes Scan rate : 2D mode: 56 images/s auto adaptive Scan Angle : 38.9° (Horizontal), 25.4° (Vertical) Optical resolution : 752 (H) x 480 (V) pixels, 256 gray levels Print Contrast : down to 25% Version : Standard range and high density
MSR (USB Interface)	Media formats: ISO 7811, AAMVA, and other F2F formats Swipe speed: 7 to 150 cm per second, bi-directional Operating Life: 1,000,000 cycles minimum
Smart card reader	Operates ISO 7816 microprocessor or memory card Transfer rates: 9600 to 115200 bps Operating Life: 1,000,000 cycles minimum
RFID (LF & UHF in preparation)	<ul style="list-style-type: none"> HF RFID: 13.56 MHz Mifare DESFire Reader / ISO 15693 Reader UHF RFID: 860~960MHz



Contact:

sales@radioforce.net
www.radioforce.net


Technical Specifications	RFO TPC 8A Docking Station
---------------------------------	-----------------------------------

1 slots for battery charging	
RS232 Port x 1	
DC Jack x 1	
RJ45 Port x 1	
USB Port x 4	
Phone Jack x 1	
Audio Jack x 1	Color: Black

RFO TPC8A mounted on Docking Station



Car and Truck power supply

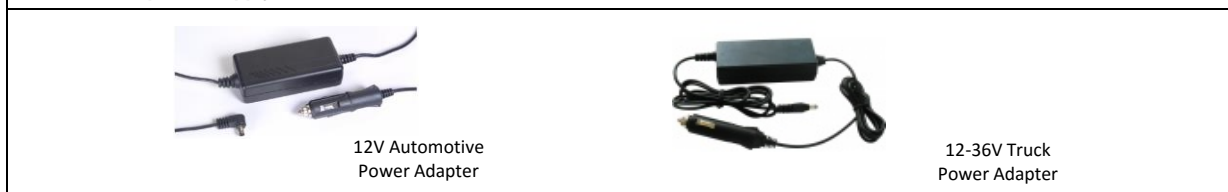

Article no:	Docking station	RFO TPC8A DS
--------------------	-----------------	---------------------