



RFO DTHF USB (Desktop RFID HF Reader/writer)

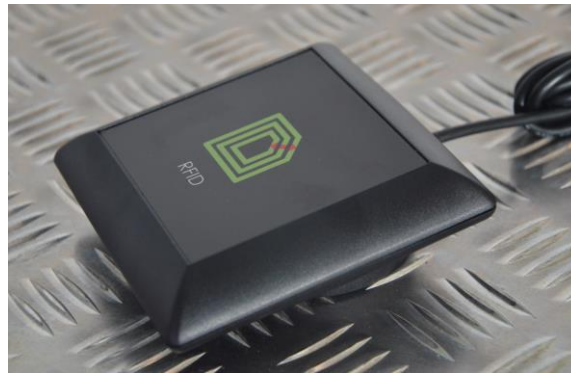

DATA SHEET

Product Description		RFO DTHF USB			
Technical data					
Read/write unit version	MIFARE	MULTI ISO	HID iCLASS	LEGIC	
Mousing:	Material ABS, colour black or white				
Frequency:	13,56 MHz				
Dimensions:	110mm x 110 mm x 40/25 mm				
Power Supply:	5V ± 10% via communication cable				
Supply Current:	120mA	N/A	220mA	280mA	
Temperature Range:	0°C bis +50°C				
Antenna type:	PCB aircoil				
Read-/Write range:	up to 10cm (depending from the Tag)				
Supported RFID Transponder Tags:	ISO 14443A: Mifare Ultralight Mifare Mini Mifare 1k, 4k Mifare DESfire*	ISO14443A: Mifare Ultralight, Mifare Ultralight C, Mifare Mini Mifare 1k, 4k Mifare DESfire Mifare Plus ISO14443B ISO15693	HID iCLASS	Legic Prime, Legic Advant	

* Support is limited to reading of the serial number exclusively

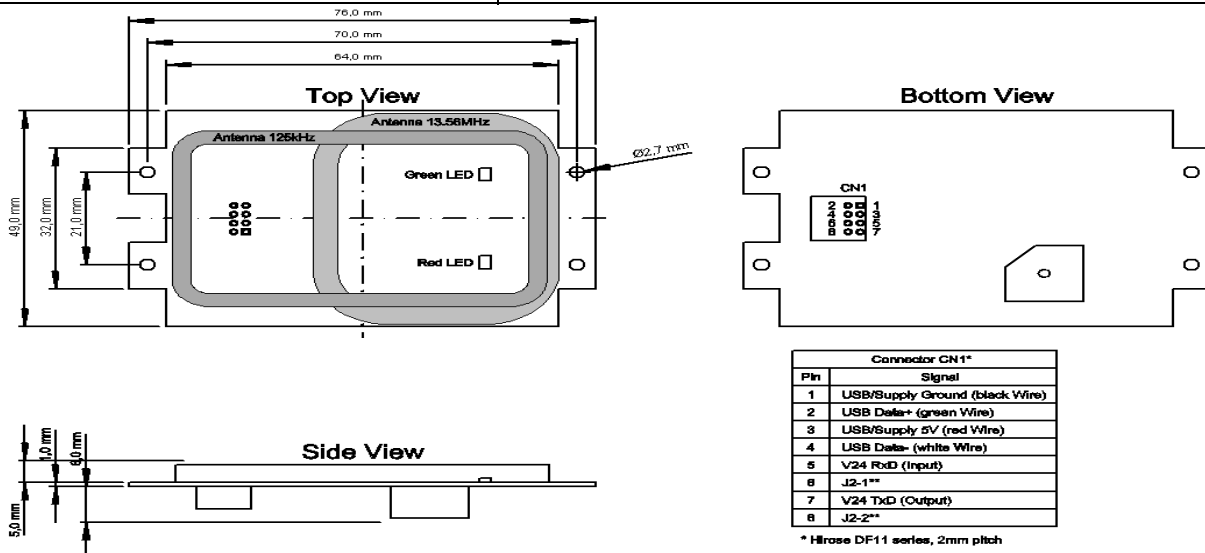

Artikel Nr:	RFO DTHF USB	
Typical Applications		
Asset Management	POS	Maintenance and Service
Fashion & Apparel industrie	Pharma and Cosmetic	Transport and Delivery
General Logistics	Health Care	Food
Industry & Automotive	Bibliothec and Documents	Access control



Contact:

sales@radioforce.net
www.radioforce.net